



Gardall

SAFE CORPORATION

America's Safe Company



*Safes for Every Application: Commercial,
Residential or Small Businesses*



PREMIUM QUALITY SAFES YOU CAN TRUST



THE FINEST FIRE AND BURGLARY PROTECTION AVAILABLE ANYWHERE IN THE WORLD!

Gardall designs and manufactures fire and burglary resistive safes to meet or exceed many different standards and specifications.

Standard Safe Classifications

To understand how our safes are classified, here is a brief explanation of the labels you'll find on them.

Fire Protection – Two-Hour 1850° or One-Hour 1700°

Gardall fire-resistive safes meet or exceed Underwriters' Laboratories specifications for explosion, fire endurance and drop tests.

Two-Hour exposure to severe fire with an exterior temperature to 1850°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for two hours and cool down.



One-Hour exposure to severe fire with an exterior temperature to 1700°F, and an interior temperature that does not exceed 350°F (paper chars at 405°F) for one hour and cool down.



Residential Security Container Burglary Label

Gardall's 2-Hour Burglary Fire (pg. 2), BF (pg. 4) and FB (pg. 7) models have passed the U.L.-R.S.C. label test for burglary protection.



Burglary Protection

Gardall safes with the Class "B" or Class "C" Burglary Insurance Rating allow you to receive insurance coverage in accordance with the Broad Form and Mercantile Safe Insurance classifications. Pertinent insurance information is available from Insurance Service Office, 160 Water Street, New York, NY 10038.

Gardall safes can be supplied with an Underwriters' Laboratory Group II combination lock, U.L. listed key-op lock, U.L. listed dual key lock or a U.L. listed push button electronic lock.

Gardall Lifetime Replacement Warranty


Gardall Safe Corporation assures to the original end consumer, replacement – free of charge – of any Gardall Fire-Resistive Record Safe damaged beyond repair by fire with a then-current production model of a comparable value. This warranty is exclusive and in lieu of any warranty of merchantability, fitness for particular purpose or other warranties of qualities, whether expressed or implied, and of all other liabilities and obligations on the manufacturer's part.

Gardall Safe Corporation reserves the right to inspect any record safe prior to replacement. Copies of insurance reports or documents pertaining to fire loss will be furnished to Gardall Safe Corporation upon request.

Gardall Safe Corporation specifically assumes no liability for installation or other charges incurred by the owner in connection with the replacement of any record safe and assumes no liability for damage to contents or personal property contained in any such file or any consequential damages of any nature or description.

Pictures & Specifications

| | |
|---------------------------------------------------------------------------------------------------------------------------------|----|
| U.L. Two-Hour 1850°F Burglary Fire Safes – Small and Medium Sizes _____ | 2 |
| Large Two-Hour Fire Safes _____ | 3 |
| U.L. Burglary Rated / One-Hour Fire Safes – BF Series _____ | 4 |
| Data-Media Safes _____ | 5 |
| One-Hour Microwave Fire Safes _____ | 6 |
| U.L. One-Hour Fire / Burglary Safes _____ | 7 |
| Economical Two-Hour Record Safes _____ | 8 |
| Heavy Duty Single and Double Door Depositories – Front and Back Loading _____ | 9 |
| Heavy Duty Cash Register Tray / Wide Body Depositories _____ | 10 |
| Economical Depository Safes – “B” Rated _____ | 11 |
| Commercial Light Duty/Cash Management, Depository and Undercounter Safes _____ | 12 |
| Commercial “B” Rated Money Chests _____ | 13 |
| Under Counter Depositories / Utility “B” Rated Safe _____ | 14 |
| Concealed Wall Safes – Heavy Duty, Regular and Insulated _____ | 15 |
| Firelined Gun Safes _____ | 16 |
| Firelined Gun/Pistol Safes _____ | 17 |
| Dual Security – “B” Rated Safe within a Two-Hour Fire Safe and Safe Chest Combination – TL15 / U.L. Two-Hour Fire Safe _____ | 18 |
| Commercial High Security – TL15, TL30 and TL30X6 _____ | 19 |
| In-Room Safe (Hotel, Hospital, Residence Hall) and Jewelry Safe _____ | 20 |
| Commercial In-Floor Safes _____ | 21 |

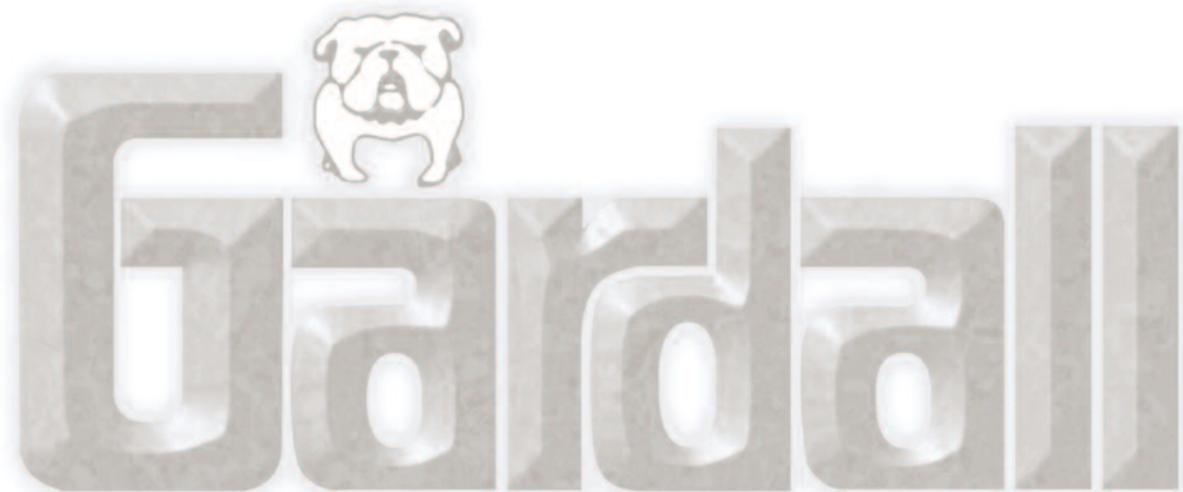



**Gardall's New Two-Hour Safes,
with the Most Features in the Industry**

Visit us online at
www.gardall.com
MADE IN THE U.S.A.

Can Your Business or Home Office Survive Record Losses From Fire?

Statistics show that if a company's records are lost in a fire, 17% can no longer furnish a financial statement, 14% suffer a reduction in credit rating and 43% go out of business completely. No home or business is safe from fire. Your vital records and possessions are only as safe as the quality of protection you provide for them. With Gardall fire resistive safes, you can be confident your records will survive.



Standard Features

- Thick 4¼" door with recessed anti-pry design. Safe walls are 2½" thick
- Five active bolts that lock in 3 directions, massive 1" diameter round bolts that extend deep into safes' body (Models 1812-3018)
- Center bolt down hole with hardware included for easy installation (hardware included)
- Plush carpeted quality interior to protect jewelry and valuables (Models 1812-3018)
- UL listed, S&G Group II combination lock
- UL 2-Hour Fire Label, furnace-tested to 1850°F for 2 hours. Interior temperature of safe was less than 350°F during the test and cool down
- UL-RSC Burglary Label Models 1812/2 – 3018/2

- Solid chrome-plated handle with shear point to prevent the safe from being forced open by handle attack
- Independent re-locker and hardplate to prevent drilling attack on locking mechanism
- **Gardall Lifetime Replacement Warranty** (see inside front cover)

Options

- Key locking dial
- Push button electronic lock
- Custom Paint with Gold trim – rich color exteriors (Black, Burgundy, or Hunter Green)

Standard colors: Sandstone or Gray.



| Model | Outside Dimensions | | | Inside Dimensions | | | Cubic Inches | Weight (lbs.) | Shelves |
|----------|--------------------|------|------|-------------------|-----|------|--------------|---------------|---------|
| | H | W | D | H | W | D | | | |
| 1612/2* | 23¼" | 17¼" | 19¾" | 16" | 12" | 11¼" | 2256 | 298 | 1 |
| 1812/2 | 25" | 17¼" | 19¾" | 18" | 12" | 11¼" | 2538 | 313 | 1 |
| 1818/2 | 25" | 17¼" | 25¾" | 18" | 12" | 17¾" | 3834 | 392 | 1 |
| 171718/2 | 25" | 23¼" | 25¾" | 18" | 18" | 17¾" | 5751 | 487 | 2 |
| 2218/2 | 29¼" | 23¼" | 25¾" | 22" | 18" | 17¾" | 7029 | 525 | 2 |
| 3018/2 | 37¼" | 23¼" | 25¾" | 30" | 18" | 17¾" | 9585 | 620 | 3 |

Add 2" to outside depth for dial and handle. *Not available with UL-RSC Label.

All specifications are subject to change without notice. The above mentioned Gardall fire resistive safes carry a U.L. 2 hour 350° Fire Label as to Fire and Impact tests.



**Your Best Protection
Against Fire or Theft**

Visit us online at
www.gardall.com
MADE IN THE U.S.A.

These Gardall fire resistive safes are designed and tested to withstand severe fire with outside temperatures reaching 1750°F for two hours. Safe interior temperatures will not exceed 350°F within two hours. The charring of paper occurs at 405°F. All Gardall fire resistive safes provide a comfortable margin that protects your valuables. But these models don't stop at just fire protection. They also have Class "B" burglary resistive features built in right at the factory.

And don't forget, every fire insurance policy states that "proof of loss" is required for claims. When your business or personnel inventories are locked inside a Gardall fire resistive safe, your "proof of loss" is protected 24 hours a day, 7 days a week.



Standard Features

- Five active locking bolts in a three-way configuration
- Three plated deadbolts extend into safe wall preventing entry if hinges are removed.
- Hard plate between the lock and dial ring.
- Independent relocking device designed to stop forced entry or drill attacks
- UL listed, S&G Group II combination lock
- Heavy duty casters to allow the safe to be positioned easily (welded on)
- **Gardall Lifetime Replacement Warranty** (see inside front cover)

Manufacturers 2-Hour Fire Label

A safe similar in construction was tested by an independent testing facility. The furnace temperature reached 1750°F for a period of time exceeding 2 hours, before the interior of the safe reached 350°F.

Lock Options

- Push Button Electronic
- Mechanical Combination
- Single Key (Key-op)

Standard colors: Gray or sandstone.

The above mentioned Gardall fire resistive safes carry a 2-hour Manufacturers Fire Label.

All specifications are subject to change without notice.



| Model | Outside Dimensions | | | Inside Dimensions | | | Cubic Inches | Approx. Weight (lbs.) | Shelves |
|-------|--------------------|------|------|-------------------|------|------|--------------|-----------------------|---------|
| | H | W | D | H | W | D | | | |
| 3620 | 43½" | 25¾" | 26¾" | 36¼" | 20½" | 19½" | 14,490 | 804 | 3 |
| 4220 | 49½" | 25¾" | 26¾" | 42¼" | 20½" | 19½" | 16,890 | 871 | 3 |
| 4820 | 55½" | 25¾" | 26¾" | 48¼" | 20½" | 19½" | 19,285 | 975 | 4 |

Add 2" to outside depth for dial and handle.



Your Best Protection Against Fire and Burglary

Visit us online at
www.gardall.com
MADE IN THE U.S.A.

All BF safes were tested by the manufacturer along side a U.L. listed one-hour fire safe in an independent fire testing facility. The BF safe actually outperformed the U.L. fire safe by 15 minutes. The exterior of the safe was heated to 1700°F for one hour and during that time the interior temperature of the safe was less than 270°F. A letter of certification is available upon request. All BF safes carry Gardall's Lifetime Replacement Guarantee.



Gardall's BF models provide both burglary and fire protection for your home or office application. We have been manufacturing fire safes since 1950 and the BF safe is our premier model in quality and function.

Standard Features

- **Door:** 1½" profile door panel with overall 4" thickness, insulated for protection against fire, with a "B" burglary rating.
- **Body:** 1/8" plate steel with 2½" of insulation and a metal inner shell.
- UL listed, S&G Group II combination lock

Anti Burglary Components:

- Hard plate to deter drilling.
- Independent re-locking device.
- Solid steel handle designed to shear off under attack.
- Three massive 1" round chrome plated locking bolts.
- Full length locking bar on hinge side of safe deterring prying attacks.
- One anchoring hole in base for easy bolt down. (hardware included)
- **Gardall Lifetime Replacement Warranty** (see inside front cover)
- Intumescent seal to ensure a positive door seal in case of fire.

Fire and Burglary Labels

- U.L. Residential Security Container Burglary Label (RSC)
- Manufacturer's 350°F 1 Hour Fire Label

Lock Options

- Electronic, Combination, Single Key

Standard colors: Gardall Gray or Sandstone.

Deluxe Option

- Gold handle, dial and trim.

Optional Color:

Black, hunter green, maroon



* Intumescent means an expandable door seal meant to protect your valuables from fire, smoke, and water damage.



| Model | Outside Dimensions | | | Inside Dimensions | | | Cubic Inches | Approx. Weight (lbs.) | Shelves |
|--------|--------------------|------|------|-------------------|------|------|--------------|-----------------------|---------|
| | H | W | D | H | W | D | | | |
| BF1713 | 21¼" | 18¼" | 20⅞" | 16½" | 13" | 13¼" | 2,842 | 355 | 1 |
| BF2016 | 25¼" | 21¼" | 22⅞" | 20" | 16½" | 15¼" | 5,032 | 467 | 1 |
| BF3318 | 38¼" | 23" | 26¼" | 33" | 17¼" | 18" | 10,246 | 796 | 2 |

Add 2" to outside depth for dial and handle.



Your Best Protection for
Media Against Fire or Theft

Visit us online at
www.gardall.com



With the growing number of homes and offices using computers, the protection of magnetic media has become extremely critical. The loss of personal as well as business records can be costly and devastating. The average fire safe is not designed to protect your electronic records. Gardall's media safes are designed to meet the additional requirements of protecting magnetic media. For your convenience we offer two sizes to choose from.

Standard Features

- Push button electronic lock with key day lock
- 3 way bolt work with bolt detent
- Push button electronic lock – 6-digit combo
- One or two removable shelves (model dependent)
- No anchoring holes
- Key operated day lock
- **Gardall Lifetime Replacement Warranty**
(see inside front cover)

Protect Your Electronic Media

- Office Computer Back-Ups
- Home Computer Back-Ups
- Digital Pictures
- Music CDs
- DVDs
- Video Tapes
- One-hour fire protection for media products
- 150°F Fire Label

| Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Weight (lbs.) | Shelves |
|--------------|--------------------|------|------|-------------------|------|-----|-----------------------|---------|
| | H | W | D | H | W | D | | |
| EDS1210-G-EK | 21½" | 19½" | 18½" | 10⅞" | 9" | 7¼" | 209 | 1 |
| EDS2214-G-EK | 31½" | 23¼" | 20" | 20¾" | 12½" | 8" | 374 | 2 |

Add 1½" to outside depth for dial and handle. No bolt-down hole in these models.



**Gardall Microwave Safes...
Premium Quality You Can Trust**

Visit us online at
www.gardall.com



Microwave Safes

- One-hour fire safe label*
- Three compact sizes
- Center bolt down (hardware included)
- Dual security key and combination (mechanical only)
- Programmable electronic lock with over-ride code
- Individual packaging for UPS type shipping
- Powder coated paint for increased durability
- Pull-out tray for storage of small items
- **Gardall Lifetime Replacement Warranty**
(see inside front cover)

Gardall offers a full range of U.L. approved fire resistive microwave style safes. These safes are made to Gardall's exact specifications and brought to you with the same care and quality you have come to expect from Gardall. Microwave style safes come with either mechanical or electronic style locks. All fire safes have plated interlocking bolts that extend into the safe walls to prevent tampering and removal of doors. The doors are precision built of extra heavy steel, full swinging on heavy duty hinges with interlocking, tongue and groove closure on all sides of the door frame. All safes come with a center bolt down hole and hardware to anchor the safe down.

| Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Wt. (lbs.) | Description |
|---------------|--------------------|------|------|-------------------|------|------|--------------------|-------------------------------------------------|
| | H | W | D | H | W | D | | |
| MS911-G-CK | 11½" | 15¼" | 12½" | 8½" | 12" | 8½" | 61 | Horizontal 1 Hr Fire Safe with Combination Lock |
| MS911-G-E | 11½" | 15¼" | 12½" | 8½" | 12" | 8½" | 61 | Horizontal 1 Hr Fire Safe with Electronic Lock |
| MS119-G-CK | 15¼" | 11½" | 12½" | 12" | 8½" | 8½" | 61 | Vertical 1 Hr Fire Safe with Combination Lock |
| MS119-G-E | 15¼" | 11½" | 12½" | 12" | 8½" | 8½" | 61 | Vertical 1 Hr Fire Safe with Electronic Lock |
| * MS912-G-CK | 13½" | 16¾" | 15¼" | 9½" | 12¾" | 10¼" | 85 | Horizontal 1 Hr Fire Safe with Combination Lock |
| * MS912-G-E | 13½" | 16¾" | 15¼" | 9½" | 12¾" | 10¼" | 85 | Horizontal 1 Hr Fire Safe with Electronic Lock |
| * MS129-G-CK | 16¾" | 13½" | 15¼" | 12¾" | 9½" | 10¼" | 85 | Vertical 1 Hr Fire Safe with Combination Lock |
| * MS129-G-E | 16¾" | 13½" | 15¼" | 12¾" | 9½" | 10¼" | 85 | Vertical 1 Hr Fire Safe with Electronic Lock |
| * SS1612-G-CK | 20" | 16¼" | 17½" | 16½" | 11½" | 11½" | 143 | Vertical 1 Hr Fire Safe with Combination Lock |
| * ES1612-G-E | 20" | 16¼" | 17½" | 16½" | 11½" | 11½" | 143 | Vertical 1 Hr Fire Safe with Electronic Lock |

* U.L. 350°F One-Hour Label – Fire and Impact Test

Add 1½" to outside depth for dial and handle.



One-Hour Gardall Safes...
Premium Quality You Can Trust

Visit us online at
www.gardall.com

U.L. One-Hour Fire/Burglary Safes



Gardall's FB series safes are the next higher level of protection after our U.L. two-hour series safes. They have easily passed both the U.L. Fire and U.L.-R.S.C. tests.

Fire/Burglary Safe Standard Features

- Heavy duty construction 4" thick door, 3" thick body
- Composite construction door & body
- Independent glass re-locking system
- 3 spoke chrome plated vault handle
- 1 Hour U.L. 350°F Fire Label
- U.L. RSC Burglary Label

- Center bolt down for ease of installation (hardware included)
- 1¼" chrome plated locking bolts
- Attractive two tone paint for increased durability
- UL listed, S&G Group II combination lock
- *Gardall Lifetime Replacement Warranty (see inside front cover)*

Lock Options

- U.L. electronic or key-op lock

| Model | Outside Dimensions | | | Inside Dimensions | | | Cubic Inches | Approx. Weight (lbs.) | Shelves |
|--------|--------------------|------|------|-------------------|------|------|--------------|-----------------------|---------|
| | H | W | D | H | W | D | | | |
| FB1212 | 17¾" | 17¾" | 20½" | 12" | 12" | 12¾" | 1836 | 205 | 1 |
| FB2013 | 27" | 20" | 20½" | 20½" | 13¾" | 12⅝" | 3558 | 313 | 2 |
| FB2714 | 33½" | 20" | 22¾" | 27½" | 14¾" | 14¾" | 5982 | 412 | 2 |

Add 2" to outside depth for dial and handle.



Two-Hour Gardall Safes...
Premium Quality You Can Trust

Visit us online at
www.gardall.com



Economical Two-Hour Record Safes

Gardall offers a full range of two-hour record safes, for residential or commercial use. All models are available with an attractive two-tone glossy finish. All models carry a SP120 Two-Hour Fire Label.

- **Gardall Lifetime Replacement Warranty**
(see inside front cover)

Standard Features (Models 1913-4422)

- UL listed, S&G Group II combination lock
- 3 way bolt work (5 active bolts)
- Day lock
- Pull out inner key locking compartment
- Center bolt down hole with hardware included
- SP120 Fire Test – Extreme furnace temperature up to 1850°F for two hours. The interior of the safe was not damaged and only rose to 302°F for a high temperature

| Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Weight (lbs.) | Shelves |
|--------------|--------------------|------|------|-------------------|------|------|-----------------------|---------|
| | H | W | D | H | W | D | | |
| SS1913-G-CK▲ | 24¾" | 19¾" | 18¼" | 15¼" | 12½" | 11¾" | 210 | 1 |
| SS2517-G-CK▲ | 31" | 23" | 20" | 21½" | 16½" | 13¼" | 352 | 1 |
| SS3918-G-CK▲ | 46" | 25¼" | 25" | 35" | 18¼" | 17¾" | 650 | 2 |
| SS4422-G-CK▲ | 50¾" | 29¼" | 25¼" | 39½" | 22½" | 17¾" | 805 | 2 |

▲ S&G mechanical lock standard Add 1½" to outside depth for dial and handle.



Gardall's Single Door Depositories

Visit us online at
www.gardall.com



Designed to protect money collection where immediate deposit is required. Deposit can be made into the safe while the door is locked. Exclusive baffle design prevents contents from being removed through the entry opening. Hopper rotor is built into safe body and cannot be removed to gain access to the safe.

Heavy Duty Depositories Standard Design Benefits

- CLASS B Insurance Rating – 1/2" steel door with punch resistant bolt and relocking device to deter forcible entry. 1/4" steel body construction.
- Dual Custody Key Locks – Requires 2 keys to open door for absolute security.
- UL listed, S&G Group II combination lock.
- Triple boltwork with independent relocking device.
- Relocking device – If back cover is knocked off of lock, the independent relock device is activated, preventing bolt withdrawal. Available on either combination or dual key operated doors.

- Rotary Hopper Capacity – 3¾" x 9" x 4" designed to fit most standard money bags and envelopes.
- Front Loading Capacity – designed to fit most large money bags – 2¾" x 10½" x 7½"
- Interchangeable Doors – 2 sizes 9" x 9" and 12" x 12".
- 4 anchoring holes in base.

Standard color: Gray

All specifications are subject to change without notice.

To Operate Front Loading Depository

Pull drop door forward, place items to be deposited inside, release the drop door. Deposited item should drop inside. Open the drop door to be certain.

| Model | Outside Dimensions | | | Inside Dimensions | | | Inside Cubic Inches | Door Size | Approx. Weight (lbs.) | |
|---------|--------------------|------|-----|-------------------|------|------|---------------------|-----------|-----------------------|-----|
| | H | W | D | H | W | D | | | | |
| FL1218 | 18" | 11½" | 13" | 10½" | 10¾" | 10¾" | 1213 | 9" x 9" | 103 | |
| FL1328 | 25" | 14½" | 13" | 15" | 13½" | 11½" | 2329 | 12" x 12" | 165 | |
| BL1328 | 25" | 14½" | 13" | 15" | 13½" | 11½" | 2329 | 12" x 12" | 150 | |
| RC1237 | 36¾" | 14½" | 13" | T | 15¼" | 13¾" | 10¾" | 2180 | 12" x 12" | 220 |
| | | | | B | 14¾" | 13¾" | 10¾" | 2180 | | |
| *BL1337 | 36½" | 14½" | 13" | T | 12" | 13½" | 10¾" | 1742 | 12" x 12" | 215 |
| | | | | B | 13¾" | 13¾" | 10¾" | 2032 | | |

Above available as (K) dual key lock (C) Group II combination lock, (KO) key-op lock or (E) S&G 6120 electronic lock. Please specify.

*BL designates depository on back side of safe from door. Add 2" to outside depth for dial and handle.

IMPORTANT! These safes are built with the intent of keeping large bills and valuables out of unprotected areas, until deposits can be made. They are not meant to be used as unprotected storage safes for overnight, or lengthy periods of time. Discuss your needs with your local safe professional or if you are in doubt, call GARDALL and we will recommend a safe expert.



Your Best Protection
Against Robbery

Visit us online at
www.gardall.com

Heavy Duty Cash Register Tray/Wide Body Depositories



Keep your cash register trays secure when they are not being used. Reduce petty theft and loss from out of balance cash drawers. Available in three sizes.

Heavy Duty Cash Register Safe Standard Features

- Recessed door to help deter pry attacks.
- Hard plate around the lock, with independent relocker.
- Available with Rotary or Front Loading depository.
- Interiors – 2 adjustable shelves or 5 fixed shelves.
- UL listed, S&G Group II combination lock
- Anchoring holes in bottom to bolt safe down.
- 3–1" round bolts and full length dead bolt.
- Inside compartment 9"H x 21"W x 13"D (FL & GWB models)
- 1/2" plate steel door on Model 3522 and 3020

| Model | Outside Dimensions | | | Interior | H | W | D | Weight |
|--------------|--------------------|------|------|-------------------------------------------------------------------------|------------|--------------|-------------|--------|
| | H | W | D | | | | | |
| FL2522/2 | 33¼" | 22" | 17" | Drop compartment with cam lock 2 adjustable, removable shelves | | | | 259 |
| FL2522/5 | 33¼" | 22" | 17" | Drop compartment with cam lock 5 fixed location, removable shelves | | | | 275 |
| DS3020-G-C • | 30" | 20" | 20" | Inside Comp. | 12¼" 7" | 19½" 19½" | 17⅞" 16" | 233 |
| GWB3522 • | 35" | 21¾" | 16½" | Drop compartment with cam locks and 2 shelves, 1/2" plate steel door | | | | 307 |

• "B" rate construction Add 2" to outside depth for dial and handle.

FL compartment size 5½" x 21½" x 10½". GWB compartment size 8½" x 21⅜" x 10½"



**Economical Gardall Safes...
Premium Quality You Can Trust**

Visit us online at
www.gardall.com

Economical Depository Safes



Front Loading Depository Safes

Single Door

- "B" rated solid 1/2" thick steel door 1/4" body
- 3 active locking bolts
- Anchoring holes for ease of installation
- Anti fish baffles
- Electronic welding for strength
- UL listed, S&G Group II combination lock
- Powder coated paint for durability

Double Door

- Solid steel locking bar to prevent door removal
- Front load style for added security and ease of deposits
- Electronic welding for strength and durability
- Powder coated paint for durability

Standard Features

- 1/2" plate steel door
- 1/4" thick body
- External re-locker
- Anti fish sawtooth baffle
- Excellent for mounting in delivery vehicles
- Mounting holes pre-drilled (4)
- Available in 3 sizes
- Laser cut door for exact fit

| Model | Outside Dimensions | | | Inside Dimensions | | | Door Size | Weight (lbs.) |
|-----------------|--------------------|------|------|-------------------|------|------|------------|---------------|
| | H | W | D | H | W | D | | |
| DS1914-G-C★ | 19" | 13½" | 15" | 12" | 12¾" | 12" | 11" x 11" | 128 |
| DS1914-G-K | 19" | 13½" | 15" | 12" | 12¾" | 12" | 11" x 11" | 128 |
| DS3315-G-CC★/KK | 32¼" | 15¾" | 15¾" | 10¼" | 12½" | 14½" | 10¾" x 13" | 237 |
| SDS3315-G-EE | 32¼" | 15¾" | 15¾" | 10¼" | 12½" | 14½" | 10¾" x 13" | 237 |
| DS3920-G-CC★ | 39" | 20¼" | 22" | T | 12½" | 19½" | 19¼" | 13½" x 17½" |
| | | | | B | 12½" | 19½" | 19¼" | |

Add 1/2" to outside depth for dial and handle. ★ S&G mechanical locks standard.



**Your Best Protection
Against Robbery**

Visit us online at
www.gardall.com



Commercial Light Duty Cash Management Safes

If you need to store register trays or if you have a problem with pilferage/cash disappearances, our cash management safes may be the answer.

LCF2820 and LCF3214 have locked depositories and a separate location for manager's change supply.

| Model | Outside Dimensions | | | Inside Dimensions | | | Door Size | Weight (lbs.) | |
|---------|--------------------|-----|-----|-------------------|------|-----|-----------|---------------|-----|
| | H | W | D | H | W | D | | | |
| LCF3020 | 30" | 20" | 20" | 29½" | 19½" | 17" | 20" x 17" | 201 | |
| LCF2820 | 28" | 20" | 16" | Top | 8" | 16" | 13" | 8¾" x 16¾" | 174 |
| | | | | Bottom | 8½" | 16" | 13" | | |
| LCF3214 | 32" | 14" | 14" | Top | 11" | 13" | 11" | 10½" x 11" | 136 |
| | | | | Bottom | 12" | 13" | 11" | | |

Commercial Light Duty Depository/Undercounter Safes

When price is the objective, these safes may be your solution. With a 1/2" plate steel door and a formed

door jam, these safes will resist most sledgehammer attacks. Safes have four anchor holes and an independent relocker for increased burglary protection.



| Model | Outside Dimensions | | | Inside Dimensions | | | Door Size | Weight (lbs.) |
|----------|--------------------|-----|-----|-------------------|------|-----|-------------|---------------|
| | H | W | D | H | W | D | | |
| LC1414 | 14" | 14" | 14" | 13½" | 13½" | 11" | 10½" x 10¾" | 61 |
| LCS1414 | 14" | 14" | 14" | 13" | 13" | 11" | 10½" x 10¾" | 61 |
| LCF2014* | 20" | 14" | 14" | 10" | 13" | 11" | 10½" x 11" | 80 |
| LCR2014* | 20" | 14" | 14" | 11" | 13" | 11" | 10½" x 11" | 87 |

UL listed, S&G Group II combination lock

* Also available with dual key lock



Your Best Protection
Against Robbery

Visit us online at
www.gardall.com

"B" Rated Money Chests

These "B" rated burglary safes are great for commercial storage or home use. They feature laser cut 1/2" plate steel doors, large locking bolts and bolt down capability. Available in four different sizes.



Five massive 1/4" bolts in boltwork

Standard Features

- 1/2" plate steel door
- 1/4" steel body
- 5 active 1/4" locking bolts (except Model 2815)
- UL listed, S&G Group II combination lock
- Heavy duty hinges
- Full length locking bar to deter prying attack on hinges
- 4 anchoring holes in bottom
- 1 adjustable shelf

Lock Options

- Type I electronic locks, \$195 list extra

| Model | Outside Dimensions | | | Inside Dimensions | | | Inside Cubic Inches | Weight (lbs.) |
|--------|--------------------|---------|---------|-------------------|---------|---------|---------------------|---------------|
| | H | W | D | H | W | D | | |
| B1515 | 15" | 15 3/4" | 12 1/4" | 14 1/2" | 15 1/4" | 10 1/2" | 2322 | 130 |
| B2015 | 20 1/2" | 15 3/4" | 18 1/4" | 20" | 15 1/4" | 15 3/4" | 4804 | 161 |
| B2018 | 21 1/4" | 19 1/4" | 22 3/4" | 20 3/4" | 18 3/4" | 20 1/2" | 7976 | 214 |
| B2815 | 28 1/2" | 23 1/2" | 17 3/4" | 28" | 22 1/2" | 13 1/4" | 8347 | 329 |
| B2818▲ | 30" | 19" | 23" | 28" | 18" | 20" | 10,080 | 271 |

1/2" steel plate door, 1/4" prime steel body ▲ Model 2818 has 2 shelves Add 2" to outside depth for dial and handle.



Your Best Protection
Against Robbery

Visit us online at
www.gardall.com



Keep excess till cash locked away and out of sight to prevent loss from pilferage.

Under Counter Depository Safes – 1/2" Plate Steel Door, 1/4" Body

| Model | Outside Dimensions | | | Inside Dimensions | | | Weight (lbs.) |
|------------|--------------------|-----|-----|-------------------|-----|-----|---------------|
| | H | W | D | H | W | D | |
| DS86-G-K | 8" | 6" | 12" | 7½" | 5½" | 11" | 34 |
| DS86-G-C | 8" | 6" | 12" | 7½" | 5½" | 11" | 34 |
| TC1206-G-K | 12" | 6½" | 8" | 9¼" | 6" | 7" | 35 |
| TC1206-G-C | 12" | 6½" | 8" | 9¼" | 6" | 7" | 35 |
| DS1210-G-K | 12" | 8" | 10" | 10¼" | 7½" | 9" | 47 |
| DS1210-G-C | 12" | 8" | 10" | 10¼" | 7½" | 9" | 47 |

Anchoring holes in bottom for easy installation



Compact Utility Safes

Designed for use in walls, basements, car trunks, and RV's. Solid steel plate with insurance "B" rated construction. This safe also features a U.L. listed Group II combination lock. Door will interchange with many other Gardall Safes. 1/2" pre-drilled mounting holes in base.

Standard Features

- 1/2" plate steel door
- Independent relock on lock
- Group II electronic lock (optional)
- UL listed, S&G Group II combination lock
- 4 anchoring holes in bottom

| Model | Outside Dimensions | | | Inside Dimensions | | | Inside Cubic Inches | Approx. Weight (lbs.) |
|--------|--------------------|------|------|-------------------|-----|------|---------------------|-----------------------|
| | H | W | D | H | W | D | | |
| H2-G-C | 11¼" | 11½" | 12¾" | 10½" | 11" | 10¾" | 1184 | 70 |

Add 1½" to outside depth for dial and handle.



**Your Best Protection
Against Robbery**

Visit us online at
www.gardall.com



SL4000/F



SL6000/F

Heavy Duty Concealed Wall Safes

Wall safes have a 1" flange for easier installation. Designed to be recessed into a wall and concealed by a picture or a mirror. Available with U.L. Group II electronic lock as an option. Available for 4" or 6" wall depth.

| Model | Outside Dimensions | | | Inside Dimensions | | | Inside Cubic Inches | Approx. Weight (lbs.) |
|----------|--------------------|------|----|-------------------|-----|-----|---------------------|-----------------------|
| | H | W | D | H | W | D | | |
| SL4000/F | 12¾" | 14¾" | 4" | 12" | 14" | 2¾" | 446 | 41 |
| SL6000/F | 12¾" | 14¾" | 6" | 12" | 14" | 4½" | 756 | 47 |

*Available with or without 1" flange. Shelf is not adjustable. 1/4" door (4) 3/8" holes on sides for anchoring.



WS1317-T-EK



WS1317-T-K

Concealed Wall Safes

Wall safes have a 1" flange for easier installation. Designed to be recessed into a wall and concealed by a picture or a mirror. Available with either a key operated lock or a 6 digit electronic and key lock for extra security. 3 active bolts in boltwork. Available for 4" or 6" wall depth.

| Model | Outside Dimensions | | | Inside Dimensions | | | Weight (lbs.) |
|------------------|--------------------|------|-----|-------------------|-----|-----|---------------|
| | H | W | D | H | W | D | |
| WS1314-T-K or EK | 13¾" | 14½" | 4" | 12" | 14" | 2½" | 27 |
| WS1317-T-K or EK | 13¾" | 14½" | 5½" | 12" | 14" | 3½" | 30 |

Key required to open safe door. Shelf is not adjustable. EK – push button electronic lock



MS129-G-CK



MS912-G-E

Insulated Wall Safes

We have four models of insulated wall safes. They come with a 2" flange and bolt down hardware to make installation easier. Safes are horizontal or vertical in design and have the same features as our Microwave Safes on page 6. Flange and safe shipped separate.

| Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Weight (lbs.) |
|-------------------|--------------------|------|------|-------------------|------|------|-----------------------|
| | H | W | D | H | W | D | |
| WMS911-G-CK or E | 12" | 15¾" | 12½" | 8½" | 12" | 8½" | 75 |
| WMS119-G-CK or E | 15¾" | 12" | 12½" | 12¼" | 8½" | 8½" | 75 |
| WMS912-G-CK or E* | 14" | 17¼" | 15¼" | 9½" | 12¾" | 10¼" | 101 |
| WMS129-G-CK or E* | 17¼" | 14" | 15¼" | 12¾" | 9½" | 10¼" | 101 |

* U.L. 350°F One-Hour Label – Fire and Impact Test Add 1½" to outside depth for dial and handle.



Your Best Protection
Against Robbery

Visit us online at
www.gardall.com



MODEL 5517 FITS IN A CLOSET

**10 DOOR BOLTS
7 ACTIVE AND
3 DEAD ON
MODELS
6024-6030-
6040**

Gardall Firelined Gun Safes

GF5517

Single Layer of Fire Protection

- 3-way locking bolts - 5 active 1" bolts
- 3 wheel lock with spyproof dial
- 3 spoke handle
- 4 anchoring holes in bottom
- 11 gun capacity
- Powder coated paint
- Safe fits in standard closet
- Fire tested at 1200°F for 30 minutes
- Add 2" to depth for handle

Note: The dimensions on these safes may change. Please confirm sizes with your distributor or Gardall at (800-722-7233) before ordering.

GF6024/6030/6040

Double Layer of Fire Protection

- 3-way locking bolts - 7 active 1½" bolts
- U.L. Group II lock with spyproof dial
- 2 layers 1/2" U.L. rated fire board insulation
- 5 spoke handle
- 4 anchoring holes in bottom
- Capacity: GF6024: 9 or 18 gun capacity
GF6030: 14 or 28 gun capacity
GF6040: 47 gun capacity
- U.L. Approved Intumescent door seal expands to 7X original size
- Fire tested at 1200°F for 55 minutes
- 3 dead bolts on hinge side
- Add 3" to depth for handle

Accessories: Door Organizer for quick access and additional storage. Two sizes: Small \$25 list, Large \$35 list.

| Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Weight (lbs.) |
|--------|--------------------|------|------|-------------------|------|------|-----------------------|
| | H | W | D | H | W | D | |
| GF5517 | 55¼" | 17¾" | 16" | 53" | 16" | 11½" | 265 |
| GF6024 | 59⅞" | 24" | 22" | 55" | 21" | 16" | 593 |
| GF6030 | 59⅞" | 30" | 26" | 55" | 26¾" | 20" | 670 |
| GF6040 | 59⅞" | 40" | 26¼" | 55" | 37¼" | 20" | 950 |

Powder Coated Matte Finish: Black, Maroon or Hunter Green. 4 Anchoring Holes with Hardware included. LaGard Group II combination lock standard. S&G Type I Electronic Lock available as option.



Your Best Protection
Against Robbery

Visit us online at
www.gardall.com



**Gardall Premium
Quality Firelined
Gun Safes
with
Matte Finish:
Black, Maroon
& Hunter Green**

Fire Tested to
1200°F
for 55 minutes
(Models 6024-6040
and 6030)

Pistol Safes



Keep Firearms
Protected
from the
Wrong Hands

Model GS2522-G-C

- 1/8" Prime Steel Body
- 1/4" Prime Steel Door

| Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Weight (lbs.) |
|------------|--------------------|-----|------|-------------------|------|-----|--------------------------|
| | H | W | D | H | W | D | |
| PS915-B-E | 4¼" | 9½" | 14" | 3" | 8" | 9" | 15 |
| GS2522-G-C | 25" | 22" | 16¾" | 24½" | 21½" | 13" | 182 |

All specifications are subject to change without notice. Available with S&G Type I Electronic Lock as option.



Model PS915-B-E

- 3 Digit Electronic Lock
- Anchoring Plate
- Over-ride key included



**Your Best Protection
Against Fire and Theft**

Visit us online at
www.gardall.com
MADE IN THE U.S.A.



Designed for complete protection of your valuables, a "B" rated burglary safe securely welded inside a 2-hour fire resistive safe.



Standard Features

- Class "B" Rated interior safe construction. Door of inner safe will interchange with other Gardall safes key lock or combination.
- Fire Resistive Exterior Safe – Insulated to withstand 1850°F for 2 hours.
- UL listed, S&G Group II combination lock
- Relocking Device – If back cover is knocked off of the lock, the independent relock device is activated, preventing bolt withdrawal.
- Boltwork Interior Door – Triple boltwork with independent relock device (except Models 1812 and 1818).
- Boltwork Exterior Door – Interlocking bolts extend into the safe walls, deadbolts on hinge side of door to deter forcible entry by removal of hinges.
- Hard plate on both interior and exterior door.
- Available with electronic push-button lock.



Safe/Chest Combo

| Model | Outside Dimensions | | | | Inside Dimensions | | | Inside Cubic Inches | Appx. Wt. (lbs.) | Shelves |
|---------|--------------------|------|------|----|-------------------|------|------|---------------------|------------------|---------|
| | H | W | D | | H | W | D | | | |
| Z1812/2 | 25" | 17¼" | 19¾" | MS | 9¾" | 11" | 8" | 858 | 365 | NA |
| | | | | SS | 7¾" | 12" | 10¾" | 1000 | | |
| Z1818/2 | 25" | 17¼" | 25¾" | MS | 9¾" | 11" | 14" | 1502 | 455 | NA |
| | | | | SS | 8" | 12" | 16¾" | 1608 | | |
| Z2218/2 | 29¼" | 23¾" | 25¾" | MS | 12½" | 17¼" | 14" | 3019 | 645 | NA |
| | | | | SS | 9" | 18" | 16¾" | 2714 | | |
| Z3018/2 | 37¼" | 23¾" | 25¾" | MS | 12½" | 17¼" | 14" | 3019 | 740 | 2 |
| | | | | SS | 17½" | 18" | 16¾" | 5162 | | |
| Z3620 | 43½" | 25¾" | 26¾" | MS | 12½" | 19½" | 15¼" | 3717 | 940 | 2 |
| | | | | SS | 23¼" | 20½" | 18¾" | 8937 | | |
| Z4220 | 49½" | 25¾" | 26¾" | MS | 12½" | 19½" | 15¼" | 3717 | 1010 | 3 |
| | | | | SS | 29¼" | 20½" | 18¾" | 11243 | | |
| Z4820 | 55½" | 25¾" | 26¾" | MS | 12½" | 19½" | 15¼" | 3717 | 1110 | 3 |
| | | | | SS | 35¾" | 20½" | 18¾" | 13595 | | |

Standard colors: Gray or sandstone. Add 2" to outside depth for dial and handle.

Safe/Chest Combination - TL15 Money Safe/Two Hour Fire Safe



| Model | Outside Dimensions | | | | Inside Dimensions | | | Inside Cubic Inches | Approx. Wt. (lbs.) |
|--------|--------------------|------|------|--------|-------------------|------|-----|---------------------|--------------------|
| | H | W | D | | H | W | D | | |
| SC1230 | 55¾" | 25¾" | 26¾" | Top | 11¾" | 12" | 11" | 1158 | 1695 |
| | | | | Bottom | 30½" | 20½" | 20" | 12505 | |

Weights measured w/pallet. Shelves SC1120 – 2, SC1130 – 3. All specifications are subject to change without notice.



**Your Best Protection
Against Robbery and Fire**

Visit us online at
www.gardall.com



U.L. Listed
Composite Safes

Gardall Safe Corporation has been manufacturing premium quality safes for home and office applications since 1950. Our Commercial High Security safes are manufactured to specifications which are more stringent than many of our competitors requirements. Some of the standard features on Gardall TL15 and TL30 safes are options with other manufacturers. Please be sure to compare our specifications with those of our competitors before making your decision.

- **TL15** – Tool Resistant for 15 minutes
- **TL30** – Tool Resistant for 30 minutes
- **TL30/6** – Tool Resistant for 30 minutes all six sides of safe.

Standard Features:

Door Construction:

- TL15 – 5" slab High Density Fiber Reinforced Material
- TL30 – 5" overall, 3" slab of High Density Fiber Reinforced Barrier Material – TDRII*
- TL30x6 – TL30x6 – 4½" overall thickness with 2" Defense Barrier

Body Construction:

- TL15 – 3" slab of High Density Barrier Material
- TL30 – 5" slab of High Density Barrier Material
- TL30x6 – 4½" thick composite Reinforced Manganese steel armor plate

Anti Burglary Components:

- Cross locking relockers.
- Punch resistant spindle handle and lock.
- Tempered glass reloading trigger.
- Bridge mounted lock.
- 1¼" chrome plated locking bolts.

Locks:

- Group 2M listed combination. Key lock available for dual custody.

Hinges:

- Massive heavy duty adjustable ball bearing hinges.

Fire Rating:

- Fire tested to 1850°F. Interior temperature less than 350°F for 1 hour.

| | Model | Outside Dimensions | | | Inside Dimensions | | | Approx. Cubic Ft. | Approx. Weight | Shelves |
|--------|------------|--------------------|-----|------|-------------------|-----|------|-------------------|----------------|---------|
| | | H | W | D | H | W | D | | | |
| TL15 | T15-1818 | 23" | 23" | 19¾" | 18" | 18" | 12" | 2.25 | 665 | 1 |
| | T15-2218 | 27" | 23" | 24¼" | 22" | 18" | 16½" | 3.8 | 870 | 2 |
| | T15-3822 | 43" | 27" | 27¾" | 38" | 22" | 20" | 9.7 | 1540 | 3 |
| | T15-5022 | 55" | 27" | 27¾" | 50" | 22" | 20" | 12.7 | 1890 | 4 |
| | T15-6222 | 67" | 27" | 27¾" | 62" | 22" | 20" | 15.8 | 2240 | 5 |
| TL30 | T30-1818 | 23" | 23" | 21¼" | 18" | 18" | 12" | 2.25 | 710 | 1 |
| | T30-2218 | 27" | 23" | 25¾" | 22" | 18" | 16½" | 3.8 | 1040 | 2 |
| | T30-3822 | 43" | 27" | 29¼" | 38" | 22" | 20" | 9.7 | 1640 | 3 |
| | T30-5022 | 55" | 27" | 29¼" | 50" | 22" | 20" | 12.7 | 2020 | 4 |
| | T30-6222 | 67" | 27" | 29¼" | 62" | 22" | 20" | 15.8 | 2400 | 5 |
| | T30-7236 | 77" | 41" | 29¼" | 72" | 36" | 20" | 30 | 3650 | 6 |
| TL30X6 | T30X6-1818 | 25" | 25" | 22½" | 18" | 18" | 12" | 2.25 | 1065 | 1 |
| | T30X6-3822 | 45" | 29" | 30½" | 38" | 22" | 20" | 9.7 | 2375 | 3 |
| | T30X6-5022 | 57" | 29" | 30½" | 50" | 22" | 20" | 12.7 | 2895 | 4 |
| | T30X6-6222 | 69" | 29" | 30½" | 62" | 22" | 20" | 15.8 | 3420 | 5 |
| | T30X6-7236 | 79" | 43" | 30½" | 72" | 36" | 20" | 30 | 5050 | 6 |

TL30X6 Please call for quote



**Your Best Protection
Against Robbery**

Visit us online at
www.gardall.com

In-Room Safe



Standard Features

- 3 to 6 digit user code
- 3 bad codes puts lock in lock-out
- Easy-to-read LCD screen
- 4 anchoring holes (2 in back, 2 in bottom)
- Lock can be operated using the keypad or the credit card swipe slot
- Available with key override

Custom Sizes Available.

Please ask for a quotation.

Gardall's new in-room safe has a durable powder coated finish and a superior electronic locking system. The highly reliable lock is a one-time use combination that is set by the user for each opening. It can also be set by swiping a credit card through the slot in the lock. Every lock has a manual by-pass key to open the lock if a combination is lost.

| Model | Outside Dimensions | | | Inside Dimensions | | | Weight (lbs.) |
|---------|--------------------|--------------------|-----|-------------------|-----|-----|---------------|
| | H | W | D | H | W | D | |
| GH5-G-E | 9 $\frac{3}{8}$ " | 16 $\frac{1}{2}$ " | 15" | 7" | 14" | 14" | 32 |

Add 1" to outside depth for electronic lock.

Jewelry Safe



Standard Features

- Beautiful white paint finish
- Group II Combination Lock
- 3 active 1" locking bolts
- 5/16" solid steel plate door
- Motion sensed LED light
- 4 anchoring holes (2 in back, 2 in bottom)
- Group I Electronic Lock (available as option)
- Independent re-locker
- 10 drawers for necklaces, bracelets, rings, earrings, watches, etc.

| Model | Outside Dimensions | | | Inside Dimensions | | | Weight (lbs.) |
|------------|--------------------|--------------------|--------------------|--------------------|--------------------|---|---------------|
| | H | W | D | H | W | D | |
| JS1718-W-C | 17 $\frac{1}{2}$ " | 18 $\frac{3}{8}$ " | 13 $\frac{3}{4}$ " | 12 $\frac{1}{2}$ " | 13 $\frac{3}{4}$ " | | 134 |

Add 2" to outside depth for handle and lock.



**Your Best Protection
Against Robbery**

Visit us online at
www.gardall.com

Larger/Improved • Lower Cost • Quality Construction



In floor safes are designed to be buried in the floor and concealed by a dust cover under a rug or carpet. Installation should be done by a professional safe dealer.

Standard Features

- UL listed, S&G Group II combination lock
- Hard plate between the lock and dial ring.
- Full length locking bar hinge side of door.
- Independent relocking device to deter forced entry.
- Door frame is reinforced on bolt side.
- Coil spring assist on all doors for ease of opening and closing.
- Dust cover included.
- "B" rate burglary construction.
- 5 active 3/4" bolts on Models 1307, 1311 and 3600..

Square Tube Safe with Liftout Head

| Model | Outside Dimensions | | | Inside Dimensions | | | Inside Cubic Inches | Approx. Wt. (lbs.) | Door Size |
|-------|--------------------|----|------|-------------------|-----|-----|---------------------|--------------------|--------------|
| | H | W | D | H | W | D | | | |
| G500 | 8" | 8" | 11¼" | 7⅝" | 7⅝" | 9" | 523 | 42 | 7½"x7½"x1/2" |
| G700 | 8" | 8" | 15¼" | 7⅝" | 7⅝" | 13" | 755 | 51 | 7½"x7½"x1/2" |

Commercial In-Floor Safes

| Model | Outside Dimensions | | | Inside Dimensions | | | Inside Cubic Inches | Approx. Wt. (lbs.) | Door Size |
|--------|--------------------|------|------|-------------------|------|------|---------------------|--------------------|--------------|
| | H | W | D | H | W | D | | | |
| B1307* | 14¾" | 12⅞" | 12¼" | 13¾" | 12½" | 8" | 1375 | 100 | 12"x12"x1/2" |
| B1311* | 14¾" | 12⅞" | 17¼" | 13¾" | 12½" | 13" | 2234 | 117 | 12"x12"x1/2" |
| G3600* | 23½" | 12½" | 17¼" | 22¾" | 12" | 13½" | 3686 | 150 | 12"x12"x1/2" |

Standard color: Gray. All specifications are subject to change without notice. *5 active locking bolts.

